


擁壁高 600~3,000

■エコウォールT (H=600~3000) 規格図

設計基準強度 : 30N/mm<sup>2</sup>  
 載荷重 : q = 10kN/m<sup>2</sup>  
 土質 : 砂質土(30°)

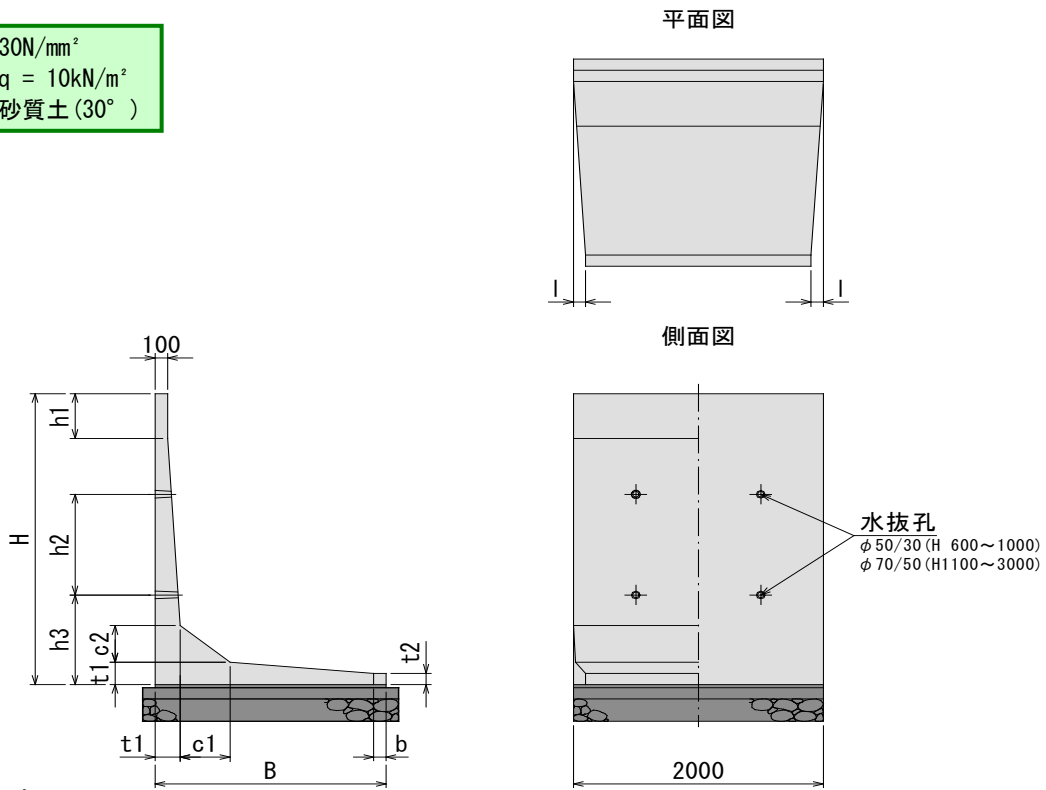

■質量・寸法表

呼び名 (H)	参考質量 (kg)	寸法 (mm)									
		B	b	c1	c2	h1	h2	h3	t1	t2	l
600	545	650	150	120	100	-	-	350	100	90	30
700	610	700	200								
800	680	750	150	120	100	-	-	500	100	90	35
900	750	800	200								
1,000	815	850	250	150	120	400	-	600	120	80	46
1,100	960	900	100								
1,200	1,040	1,000	200								
1,300	1,100	1,050	250								
1,400	1,170	1,100	300								
1,500	1,230	1,150	350	200	150	400	-	650	150	90	63
1,600	1,600	1,250	150								
1,700	1,660	1,300	200								
1,800	1,730	1,350	250								
1,900	1,800	1,400	300								
2,000	1,860	1,450	350	300	250	400	700	700	175	95	79
2,100	2,390	1,550	150								
2,200	2,460	1,600	200								
2,300	2,530	1,650	250								
2,400	2,590	1,700	300								
2,500	2,660	1,750	350	400	325	400	900	800	200	100	98
2,600	3,330	1,850	100								
2,700	3,400	1,900	150								
2,800	3,470	1,950	200								
2,900	3,530	2,000	250								
3,000	3,600	2,050	300								

※条件等、その他は担当営業までお問合せ下さい。