


水路幅 300~600(標準) 【縦断T-25】

■規格図

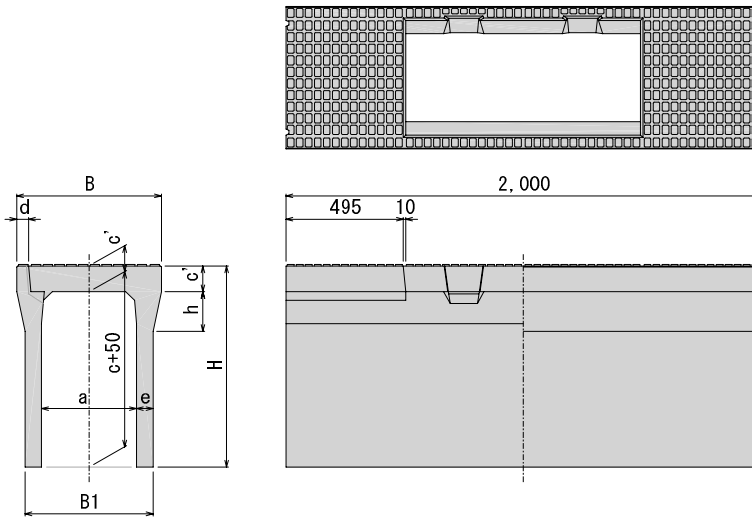


■寸法・重量

呼び名 a(幅) x c(深)	参考重量 (kg)	寸法 (mm)								
		B	H	a	c	c'	d	e	h	B1
300 x 300	326	500	445	300	95	45	50	100	400	
x 400	403		545							400
x 500	455		645							500
x 600	560		745							600
x 700	625		845							700
x 800	760		945							800
x 900	830		1,045							900
x 1,000	995		1,145							1,000
x 1,100	1,070		1,245							1,100
x 1,200	1,270		1,360							1,200
400 x 400	459	610	560	400	110	50	55	150	510	
x 500	535		660							500
x 600	590		760							600
x 700	715		860							700
x 800	780		960							800
x 900	930		1,060							900
x 1,000	1,000		1,160							1,000
x 1,100	1,180		1,260							1,100
x 1,200	1,270		1,360							1,200
500 x 400	545		720							575
x 500	600	675		500						
x 600	715	775		600						
x 700	780	875		700						
x 800	845	975		800						
x 900	1,040	1,075		900						
x 1,000	1,120	1,175		1,000						
x 1,100	1,200	1,275		1,100						
x 1,200	1,390	1,375		1,200						
x 1,300	1,480	1,475		1,300						
x 1,400	1,570	1,575	1,400							
600 x 400	640	830	590	600	140	60	65	170	730	
x 500	700		690							500
x 600	760		790							600
x 700	890		890							700
x 800	960		990							800
x 900	1,030		1,090							900
x 1,000	1,240		1,190							1,000
x 1,100	1,320		1,290							1,100
x 1,200	1,410		1,390							1,200
x 1,300	1,620		1,490							1,300
x 1,400	1,710	1,590	1,400							
x 1,500	1,800	1,690	1,500							

## 水路幅 300～600 【縦断T-25】

### ■コンクリート蓋版(300～600) 規格図

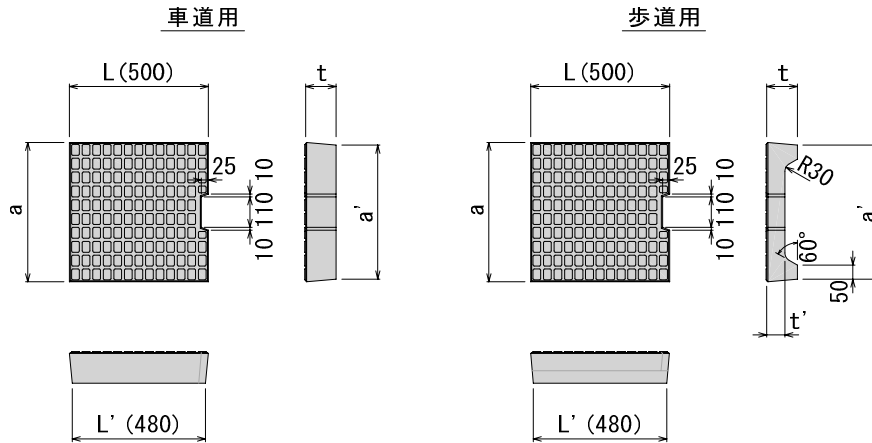

### ■寸法・重量

呼び名	参考重量 (kg)	寸法 (mm)				
		a	a'	t	t'	
車道用	300用	42	400	380	95	—
	400用	61	500	480	110	—
	500用	84	600	580	125	—
	600用	111	700	680	140	—
歩道用	300用	31	400	380	95	55
	400用	44	500	480	110	65
	500用	57	600	580	125	70
	600用	74	700	680	140	80

※グレーチング詳細寸法は担当営業にお問い合わせ下さい。