


水路幅 300~600(標準) 【縦断T-25】

■規格図

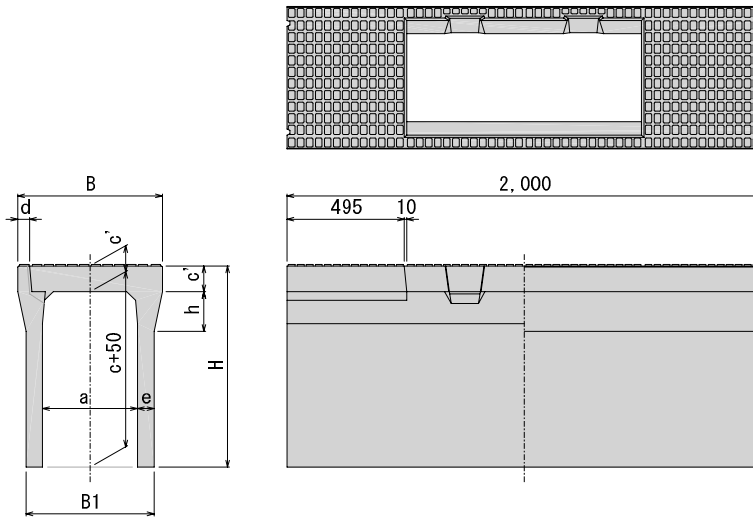


■寸法・重量

呼び名 (幅) × (深)	参考重量 (kg)	寸法 (mm)									
		B	H	a	c	c'	d	e	h	B1	
300 × 300	326	500	445	300	300	95	45	50	100	400	
× 400	403		545								400
× 500	455		645								500
× 600	560		745								600
× 700	625		845								700
× 800	760		945								800
× 900	830		1,045								900
× 1,000	995		1,145								1,000
× 1,100	1,070		1,245								1,100
× 1,200	1,270		1,345								1,200
400 × 400	459	610	560	400	400	110	50	55	150	510	
× 500	535		660								500
× 600	590		760								600
× 700	715		860								700
× 800	780		960								800
× 900	930		1,060								900
× 1,000	1,000		1,160								1,000
× 1,100	1,180		1,260								1,100
× 1,200	1,270		1,360								1,200
× 1,300	1,480		1,460								1,300
500 × 400	545	720	575	500	400	125	55	60	160	620	
× 500	600		675								500
× 600	715		775								600
× 700	780		875								700
× 800	845		975								800
× 900	1,040		1,075								900
× 1,000	1,120		1,175								1,000
× 1,100	1,200		1,275								1,100
× 1,200	1,390		1,375								1,200
× 1,300	1,480		1,475								1,300
× 1,400	1,570	1,575	1,400								
600 × 400	640	830	590	600	400	140	60	65	170	730	
× 500	700		690								500
× 600	760		790								600
× 700	890		890								700
× 800	960		990								800
× 900	1,030		1,090								900
× 1,000	1,240		1,190								1,000
× 1,100	1,320		1,290								1,100
× 1,200	1,410		1,390								1,200
× 1,300	1,620		1,490								1,300
× 1,400	1,710	1,590	1,400								
× 1,500	1,800	1,690	1,500								

水路幅 300～600 【縦断T-25】

## ■コンクリート蓋版(300～600) 規格図

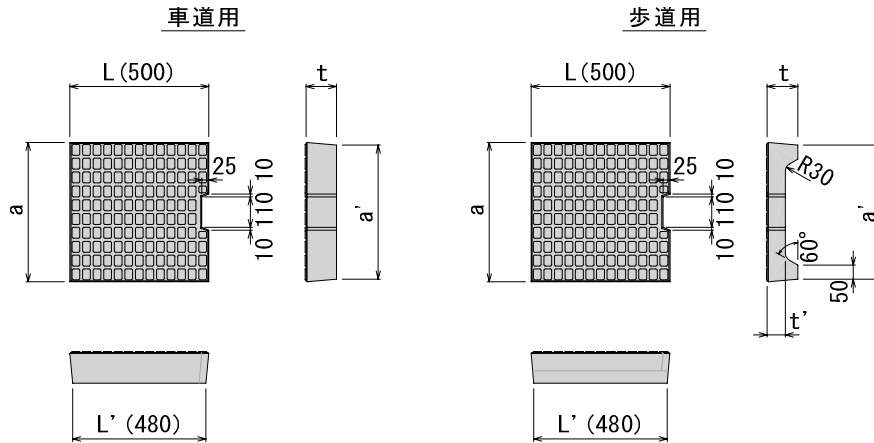

## ■寸法・重量

呼び名		参考重量 (kg)	寸法 (mm)			
			a	a'	t	t'
車道用	300用	42	400	380	95	—
	400用	61	500	480	110	—
	500用	84	600	580	125	—
	600用	111	700	680	140	—
歩道用	300用	31	400	380	95	55
	400用	44	500	480	110	65
	500用	57	600	580	125	70
	600用	74	700	680	140	80

※本製品は現在宮城県内では製造しておりません。御用命の際には担当営業にお問い合わせください。

※グレーチング詳細寸法は担当営業にお問い合わせ下さい。