


水路幅 300~600 【縦断T-25】

■規格図

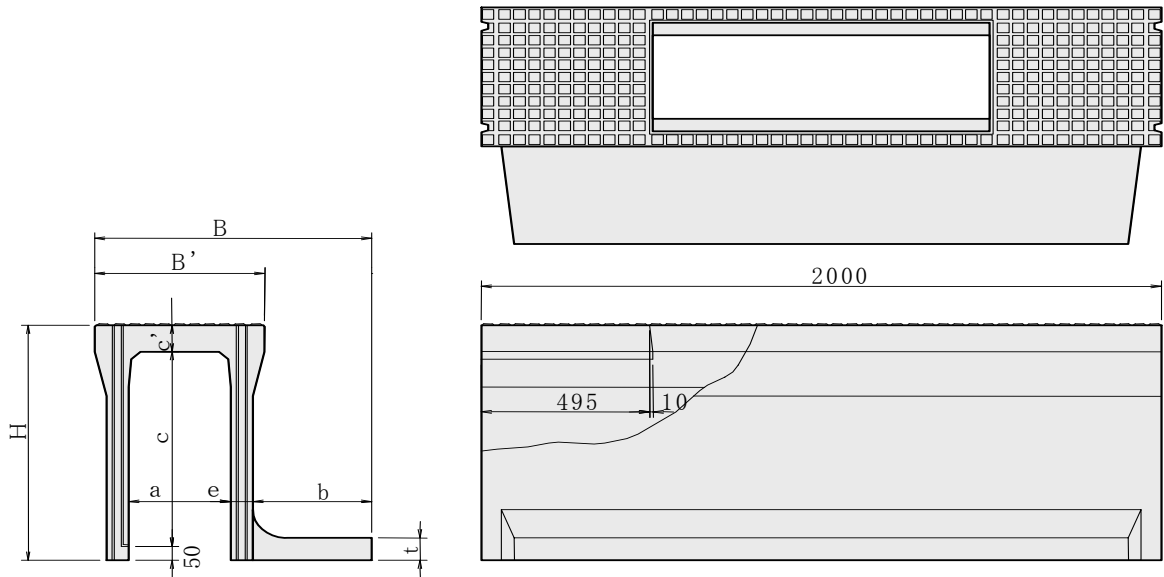


■寸法・重量

呼び名 (幅) × (深)	参考重量 (kg)	寸法 (mm)								
		B	B'	H	a	b	c	c'	e	t
300 × 300	387	700	500	445	300	250	300	95	50	50
	475	755		545		300	400			
	535	805		645		350	500			
	655	815		745		400	600			
	725	865		845		450	700			
	885	925		945		500	800			
	960	985		1,045		550	900			
	1,160	1,035		1,145		500	1,000			
	1,250	1,035		1,245		550	1,100			
400 × 400	520	810	610	560	400	250	400	110	55	50
	610	865		660		300	500			
	675	915		760		350	600			
	820	975		860		400	700			
	895	1,025		960		450	800			
	1,060	1,035		1,060		500	900			
	1,140	1,085		1,160		550	1,000			
	1,360	1,145		1,260		550	1,100			
	1,450	1,145		1,360		550	1,200			
500 × 400	605	920	720	575	500	250	400	125	60	50
	670	970		675		300	500			
	810	1,030		775		350	600			
	875			875		700				
	950	1,080		975		400	800			
	1,190	1,145		1,075		450	900			
	1,280	1,195		1,175		500	1,000			
	1,380	1,245		1,275		550	1,100			
	1,620	1,255		1,375		550	1,200			
	1,730	1,305		1,475		600	1,300			
	1,830	1,355		1,575		650	1,400			
	600 × 400	700		1,030		830	590			
760		690	300		500					
835		1,080	790	350	600					
995		1,140	890	400	700					
1,070		1,190	990	450	800					
1,160		1,240	1,090	500	900					
1,390		1,255	1,190	550	1,000					
1,490		1,305	1,290	600	1,100					
1,590		1,355	1,390	650	1,200					
1,860		1,415	1,490	650	1,300					
1,980		1,465	1,590	650	1,400					
2,070		1,465	1,690	650	1,500					

水路幅 300～600 【縦断T-25】

■コンクリート蓋版(300～600) 規格図

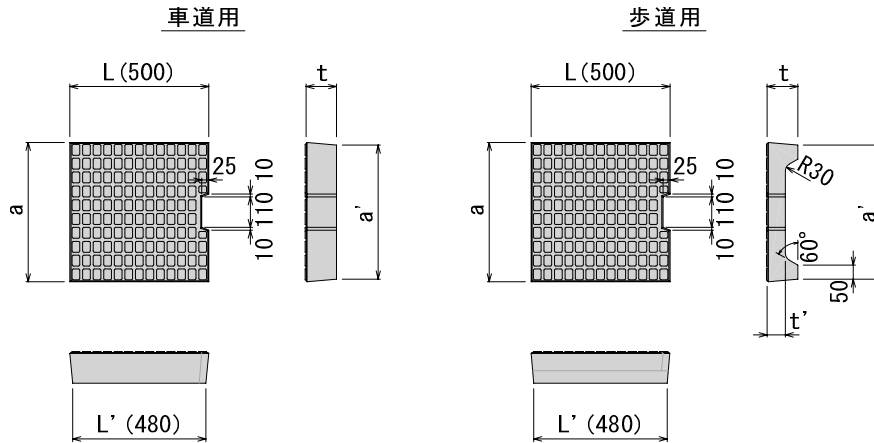

■寸法・重量

呼び名		参考重量 (kg)	寸法 (mm)			
			a	a'	t	t'
車道用	300用	42	400	380	95	—
	400用	61	500	480	110	—
	500用	84	600	580	125	—
	600用	111	700	680	140	—
歩道用	300用	31	400	380	95	55
	400用	44	500	480	110	65
	500用	57	600	580	125	70
	600用	74	700	680	140	80

※本製品は現在宮城県内では製造しておりません。御用命の際には担当営業にお問い合わせください。

※グレーチング詳細寸法は担当営業にお問い合わせ下さい。