


水路幅 700~1000 【縦断T-25】

■規格図

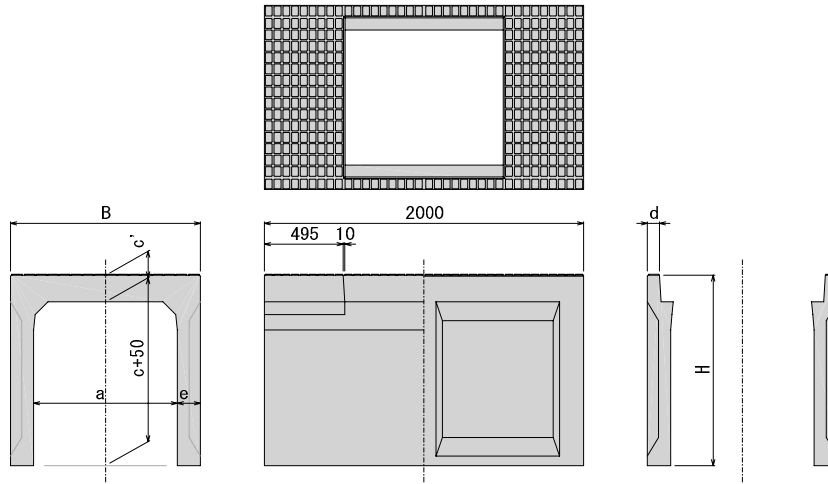


■寸法・重量

呼び名 (幅) × (深)	参考重量 (kg)	寸法 (mm)							
		B	H	a	c	c'	d	e	
700 × 500	935	970	700	700	700	500	150	70	135
	1,010		800						
	1,090		900						
	1,160		1,000						
	1,240		1,100						
	1,320		1,200						
	1,400		1,300						
	1,480		1,400						
	1,560		1,500						
	1,640		1,600						
	1,720		1,700						
	1,790		1,800						
	1,870		1,900						
	800 × 600		1,110						
1,200		910							
1,280		1,010							
1,360		1,110							
1,450		1,210							
1,530		1,310							
1,610		1,410							
1,690		1,510							
1,780		1,610							
1,870		1,710							
1,950		1,810							
2,030		1,910							
2,110		2,010							
2,110		2,010							
900 × 700	1,310	1190	920	900	900	700	170	75	145
	1,400		1,020						
	1,490		1,120						
	1,570		1,220						
	1,660		1,320						
	1,750		1,420						
	1,840		1,520						
	1,920		1,620						
	2,020		1,720						
	2,100		1,820						
	2,190		1,920						
	2,280		2,020						
	2,370		2,120						
	2,370		2,120						
1,000 × 800	1,530	1300	1,030	1000	1000	800	180	80	150
	1,620		1,130						
	1,710		1,230						
	1,800		1,330						
	1,900		1,430						
	1,990		1,530						
	2,080		1,630						
	2,170		1,730						
	2,270		1,830						
	2,370		1,930						
	2,460		2,030						
	2,550		2,130						
	2,640		2,230						
	2,640		2,230						

水路幅 700~1000 【縦断T-25】

■コンクリート蓋版(700~1000) 規格図

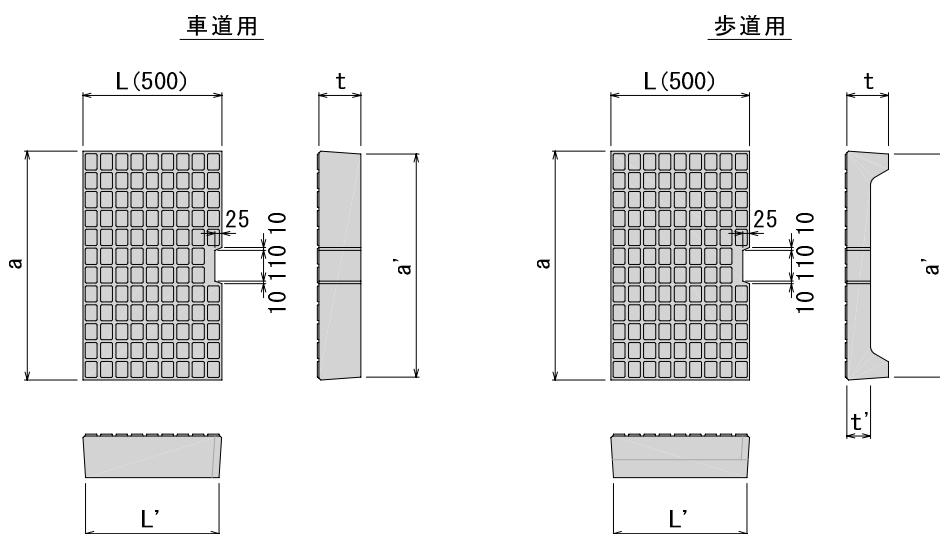

■寸法・重量

呼び名		参考重量 (kg)	寸法 (mm)				
			a	a'	t	t'	L'
車道用	700用	140	820	800	150	—	480
	800用	168	920	900	160	—	480
	900用	200	1,030	1,010	170	—	480
	1000用	232	1,130	1,110	180	—	480
歩道用	700用	92	820	800	150	85	480
	800用	109	920	900	160	90	480
	900用	129	1,030	1,010	170	95	480
	1000用	150	1,130	1,110	180	100	480

※グレーチング詳細寸法は担当営業にお問い合わせ下さい。