


水路幅 700~1000 【縦断T-25】

■規格図

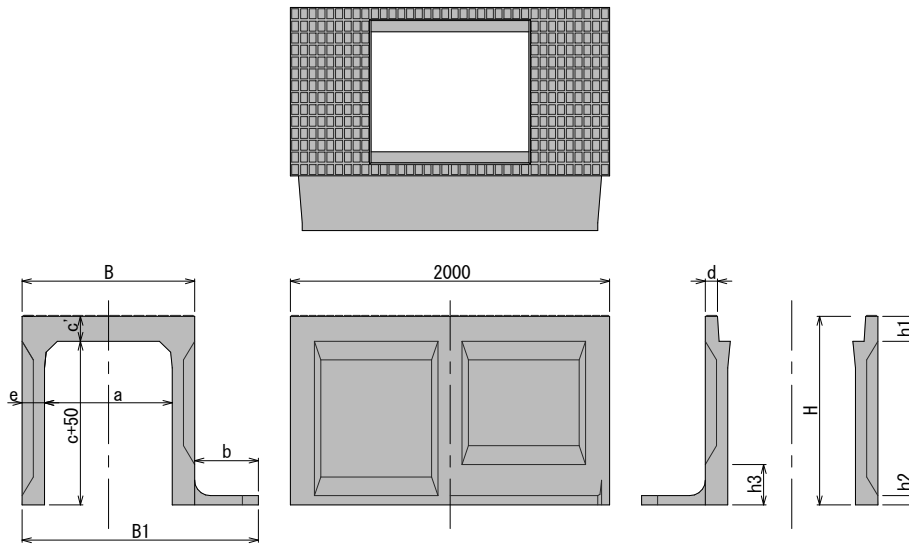


■寸法・重量

呼び名 (幅) × (深)	参考重量 (kg)	寸法 (mm)											
		B	H	a	b	c	c'	d	e	h1	h2	B1	
700 × 500	1,040	970	700	700	700	250	500	150	70	135	150	60	1,220
	1,120		800										
	1,220		900										
	1,300		1,000										
	1,390		1,100										
	1,530		1,200										
	1,620		1,300										
	1,720		1,400										
	1,860		1,500										
	1,960		1,600										
	2,050		1,700										
	2,230		1,800										
	2,330		1,900										
800 × 600	1,230	1080	810	800	800	200	600	160	75	140	160	60	1,280
	1,320		910										
	1,420		1,010										
	1,510		1,110										
	1,610		1,210										
	1,750		1,310										
	1,850		1,410										
	1,950		1,510										
	2,080		1,610										
	2,190		1,710										
	2,360		1,810										
	2,460		1,910										
	2,570		2,010										
900 × 700	1,420	1190	920	900	900	200	700	170	75	145	170	60	1,390
	1,520		1,020										
	1,670		1,120										
	1,770		1,220										
	1,870		1,320										
	2,010		1,420										
	2,120		1,520										
	2,220		1,620										
	2,410		1,720										
	2,520		1,820										
	2,620		1,920										
	2,820		2,020										
	2,940		2,120										
1,000 × 800	1,640	1300	1,030	1000	1000	250	800	180	80	150	180	60	1,550
	1,750		1,130										
	1,910		1,230										
	2,010		1,330										
	2,120		1,430										
	2,270		1,530										
	2,360		1,630										
	2,470		1,730										
	2,660		1,830										
	2,770		1,930										
	2,970		2,030										
	3,090		2,130										
	3,210		2,230										

水路幅 700~1000 【縦断T-25】

■コンクリート蓋版(700~1000) 規格図

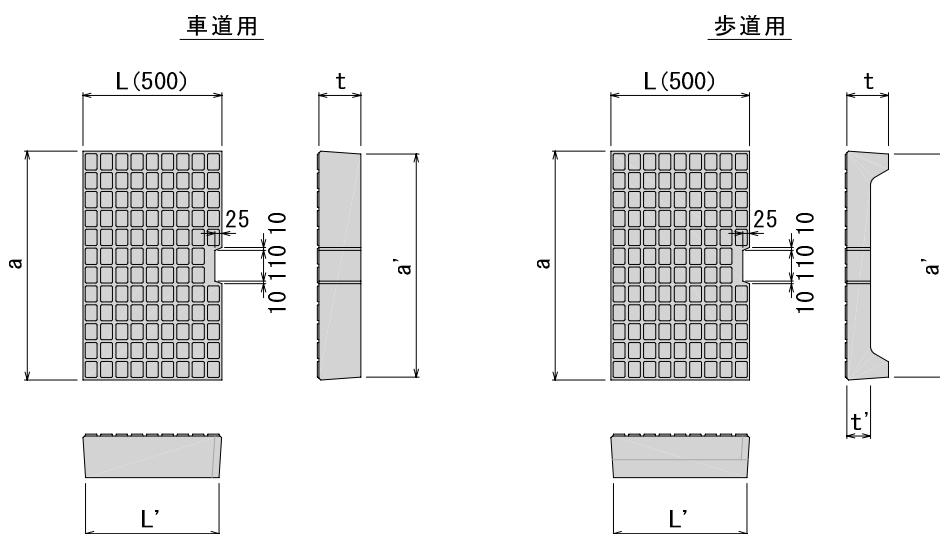

■寸法・重量

呼び名		参考重量 (kg)	寸法 (mm)				
			a	a'	t	t'	L'
車道用	700用	140	820	800	150	—	480
	800用	168	920	900	160	—	480
	900用	200	1,030	1,010	170	—	480
	1000用	232	1,130	1,110	180	—	480
歩道用	700用	92	820	800	150	85	480
	800用	109	920	900	160	90	480
	900用	129	1,030	1,010	170	95	480
	1000用	150	1,130	1,110	180	100	480

※グレーチング詳細寸法は担当営業にお問い合わせ下さい。