



L形水路施工断面図

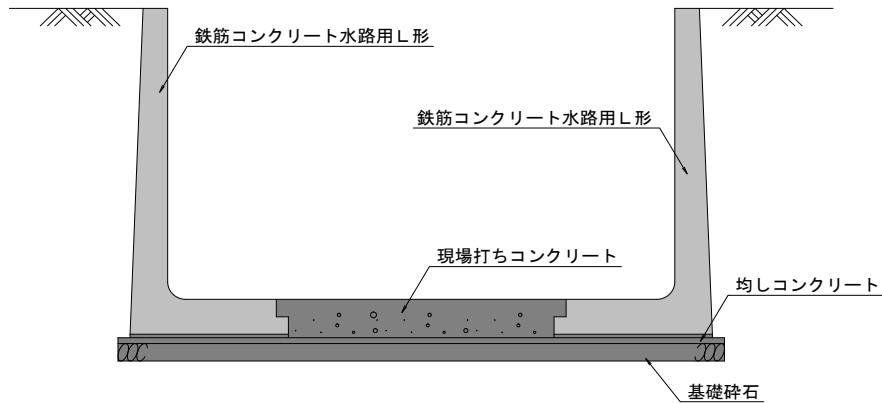

※底板現場打ち部には配筋が施されます。配筋量については農業事業協会規格によります。

水路高 1000～1400

■農林省型L形水路(H=1000～1400) 規格図

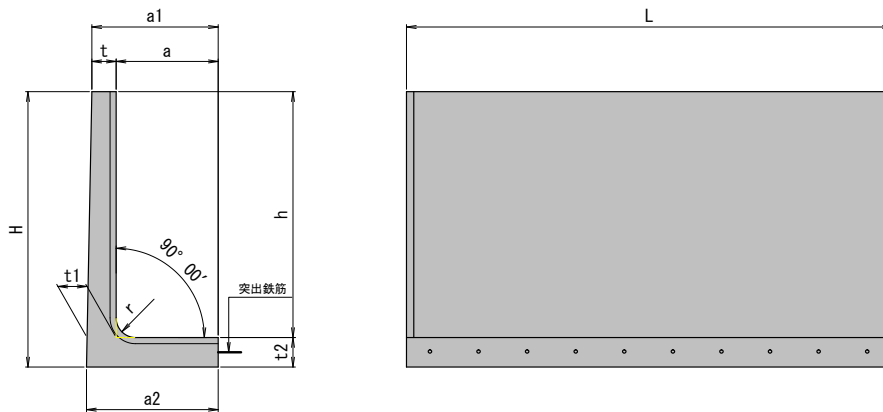


■寸法・重量

呼び名 (H)	種類	参考重量 (kg)	寸法 (mm)								
			H	a	a1	a2	t	t1, t2	r	h	L
1,000	I	820	1,120	420	520	542	100	120	80	1,000	2,000
	II										
	III										
1,200	I	1,080	1,340	420	530	564	110	140	80	1,200	
	II										
	III										
1,400	I	1,390	1,555	500	620	659	120	155	100	1,400	
	II										
	III										

水路高 1600～2600

■農林省型L形水路(H=1600～2600) 規格図

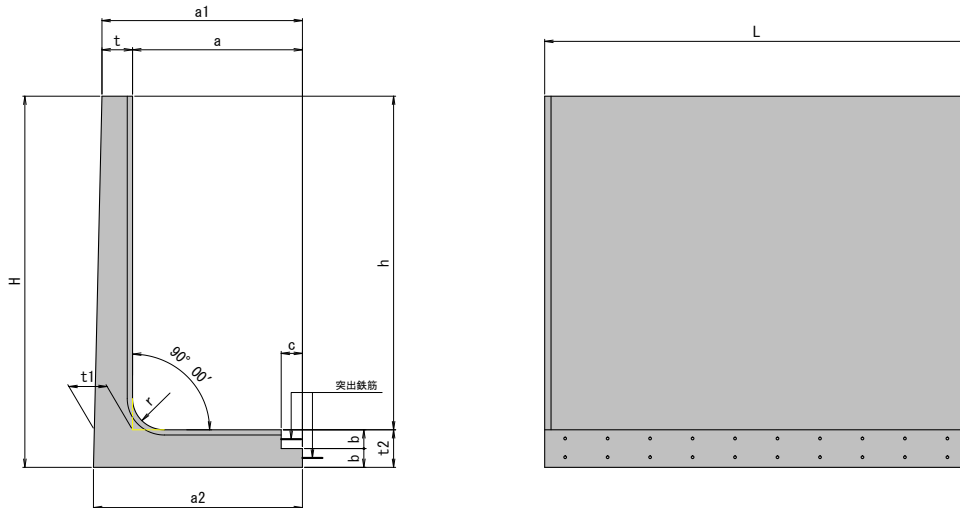

■寸法・重量

呼び名 (H)	種類	参考重量 (kg)	寸法 (mm)												
			H	a	a1	a2	t	t1, t2	b	c	r	h	L		
1,600	I	2,020	1,780	800	944	984	144	180	90	100	150	1,600	2,000		
	II														
	III														
1,800	I	2,420	2,000	800	955	1,005	155	200	100	100	150	1,800		2,000	
	II														
	III														
2,000	I	3,380	2,240	1,000	1,190	1,246	190	240	120	100	150	2,000			2,000
	II														
	III														
2,200	I	3,930	2,460	1,000	1,209	1,266	209	260	130	100	150	2,200			
	II														
	III														
2,400	I	4,240	2,680	1,000	1,180	1,292	180	280	140	100	150	2,400	2,000		
	II														
	III														
2,600	I	4,840	2,900	1,000	1,200	1,312	200	300	150	100	150	2,600		2,000	
	II														
	III														