



L形水路施工断面図

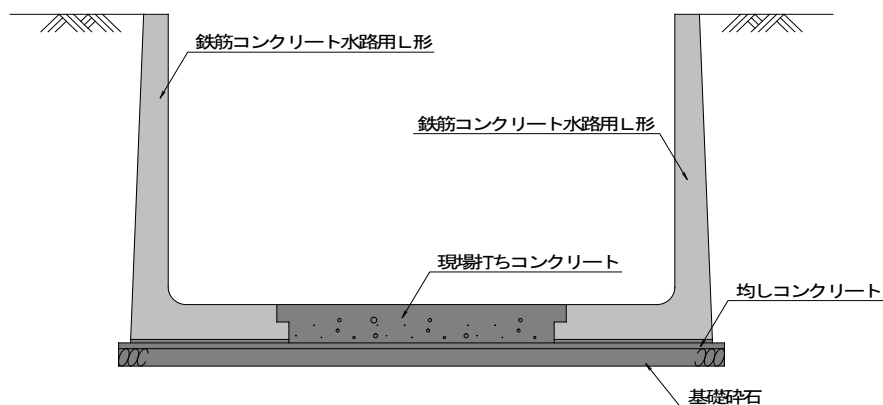

※底版現場打ち部には配筋が施されます。配筋量については農業事業協会規格によります。

水路高 1000~1400

■農林省型L形水路(h=1000~1400) 規格図

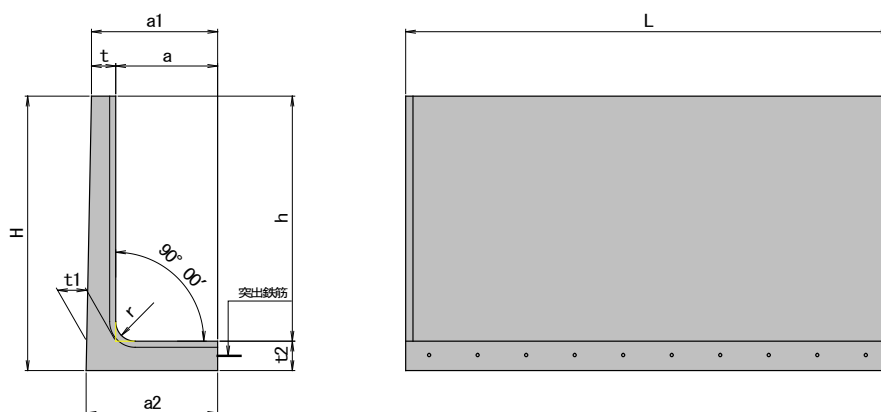


■寸法・重量

呼び名 (h)	種類	参考重量 (kg)	寸法 (mm)								
			H	a	a1	a2	t	t1, t2	r	h	L
1, 000	I	820	1, 120	420	520	542	100	120	80	1, 000	2, 000
	II										
	III										
1, 200	I	1, 080	1, 340	420	530	564	110	140	80	1, 200	
	II										
	III										
1, 400	I	1, 390	1, 555	500	620	659	120	155	100	1, 400	
	II										
	III										

水路高 1600~2600

■農林省型L形水路(h=1600~2600) 規格図

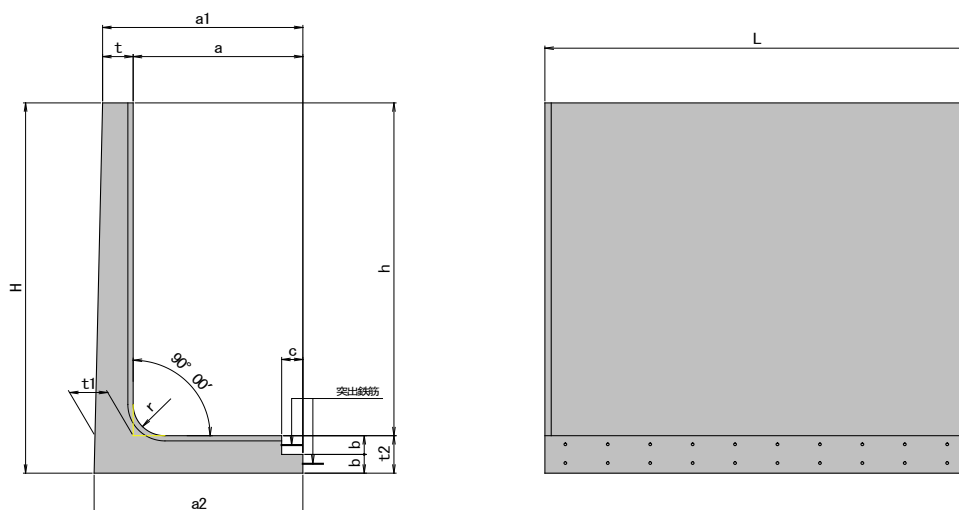

■寸法・重量

呼び名 (h)	種 類	参考重量 (kg)	寸法 (mm)									
			H	a	a1	a2	t	t1, t2	b	c	r	h
1, 600	I	2, 020	1, 780	800	944	984	144	180	90	100	150	1, 600
	II											
	III											
1, 800	I	2, 420	2, 000	800	955	1, 005	155	200	100	100	150	1, 800
	II											
	III											
2, 000	I	3, 380	2, 240	1, 000	1, 190	1, 246	190	240	120	100	150	2, 000
	II											
	III											
2, 200	I	3, 930	2, 460	1, 000	1, 209	1, 266	209	260	130	100	150	2, 200
	II											
	III											
2, 400	I	4, 240	2, 680	1, 000	1, 180	1, 292	180	280	140	100	150	2, 400
	II											
	III											
2, 600	I	4, 840	2, 900	1, 000	1, 200	1, 312	200	300	150	100	150	2, 600
	II											
	III											