


水路幅 1,100~1,500

■規格図

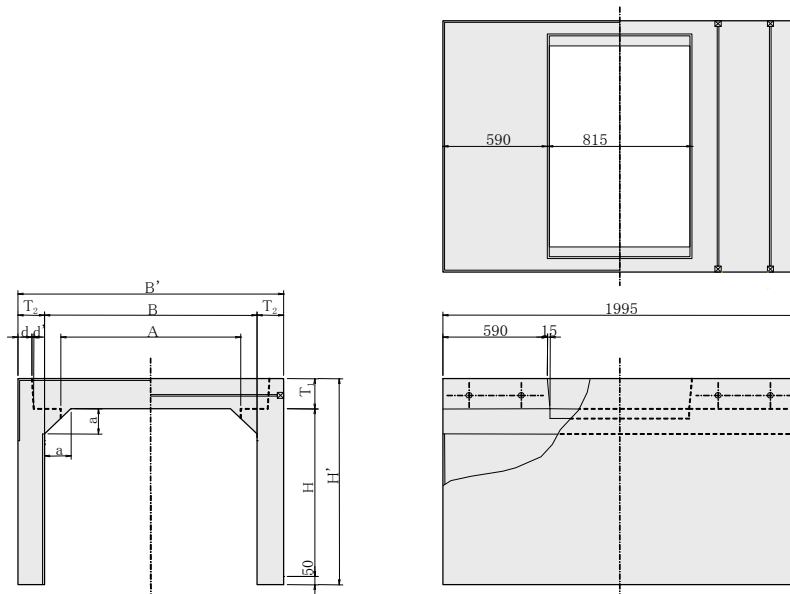


■寸法・重量

呼 び 名 a (幅) x c (深)		参考重量 (kg)	寸 法 (mm)							
			A	B'	H'	T1	T2	a	d	d'
1,100	x	800	960	1340	1,000	150	120	150	70	105
	x	900			1,100					
	x	1,000			1,200					
	x	1,100			1,300					
	x	1,200			1,400					
	x	1,300			1,500					
	x	1,400			1,600					
	x	1,500			1,700					
	x	1,600			1,800					
1,200	x	800	1060	1440	1,000	150	120	150	70	105
	x	900			1,100					
	x	1,000			1,200					
	x	1,100			1,300					
	x	1,200			1,400					
	x	1,300			1,500					
	x	1,400			1,600					
	x	1,500			1,700					
	x	1,600			1,800					
1,300	x	800	1160	1560	1,010	160	130	150	75	110
	x	900			1,110					
	x	1,000			1,210					
	x	1,100			1,310					
	x	1,200			1,410					
	x	1,300			1,510					
	x	1,400			1,610					
	x	1,500			1,710					
	x	1,600			1,810					
1,400	x	1,000	1,260	1,680	1,220	170	140	150	75	120
	x	1,100			1,320					
	x	1,200			1,420					
	x	1,300			1,520					
	x	1,400			1,620					
	x	1,500			1,720					
	x	1,600			1,820					
	x	1,700			1,920					
	x	1,800			2,020					
	x	1,900			2,120					
	x	2,000			2,220					
	x	2,100			2,320					
1,500	x	1,000	1,360	1,800	1,230	180	150	150	80	125
	x	1,100			1,330					
	x	1,200			1,430					
	x	1,300			1,530					
	x	1,400			1,630					
	x	1,500			1,730					
	x	1,600			1,830					
	x	1,700			1,930					
	x	1,800			2,030					
	x	1,900			2,130					
	x	2,000			2,230					
	x	2,100			2,330					

蓋 版

■コンクリート蓋版(1,100～1,500) 規格図

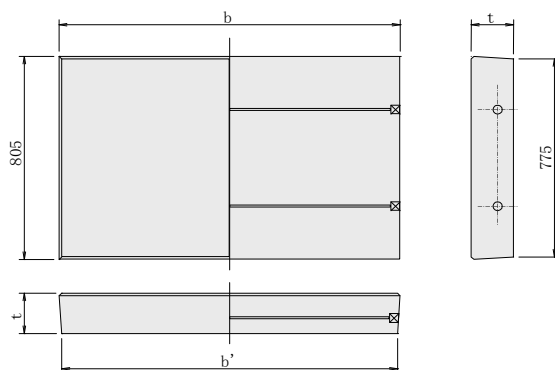


■寸 法 ・ 重 量

呼 び 名	参考重量 (kg)	寸 法 (mm)				
		a	a'	b	b'	t
1,100用	334	805	775	1,190	1,160	150
1,200用	362			1,290	1,260	150
1,300用	420			1,400	1,370	160
1,400用	485			1,520	1,490	170
1,500用	550			1,630	1,600	180

鉄筋コンクリート基礎底板標準図

■規 格 図

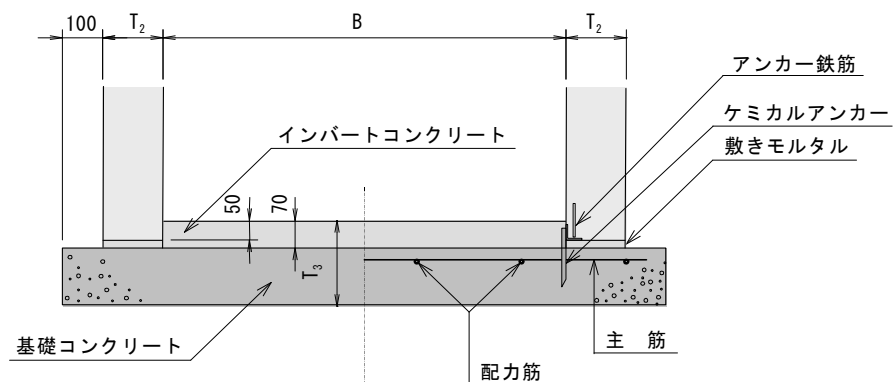

■寸 法 ・ 重 量

呼 び 名		厚 さ		配 筋				ケミカル アンカー (径～数)
		T ₂ (mm)	T ₃ (mm)	主 筋		配 力 筋		
				(径)	(数)	(径)	(数)	
車 道 用	1, 100	120	270	D16	8	D13	6	D13～4
	1, 200	120	270	D19	8	D13	6	D13～4
	1, 300	130	270	D19	8	D13	7	D13～4
	1, 400	140	270	D19	8	D13	7	D13～4
	1, 500	150	320	D19	8	D13	7	D13～4
歩 道 用	1, 100	120	220	D16	8	D13	6	D13～4
	1, 200	120	220	D16	8	D13	6	D13～4
	1, 300	130	220	D16	8	D13	7	D13～4
	1, 400	140	270	D16	8	D13	7	D13～4
	1, 500	150	270	D16	8	D13	7	D13～4

注1) 主筋本数及びケミカルアンカー本数は、製品1本(延長方向2m)当りの数値です。