


サイズ 1,600 × 5,000 ~ 3,000 × 8,000



活荷重 : T-25
 土の単重 : 18kN/m³
 土の内部摩擦角 : 20°、25°、30°
 水平土圧 : クーロン土圧
 準拠指針等 : 農林水産省 設計「水路」

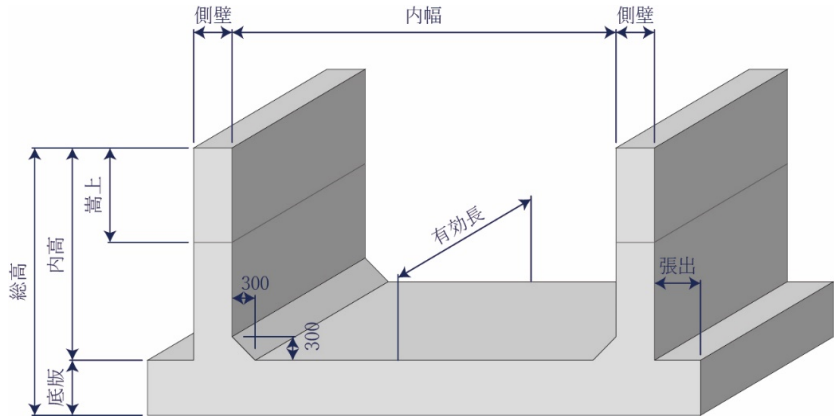

■寸法・重量

呼び名(mm)	部材厚(mm)			嵩上高(mm)	参考質量(kg)						
	内高×内幅	側壁	底版		張出	1.0m		1.5m		2.0m	
						本体	嵩上板	本体	嵩上板	本体	嵩上板
1600	×5000	250	250	500	-	6,060	-	9,090	-	12,130	-
	×5500				6,380	-	9,560	-	12,750	-	
	×6000				6,690	-	10,030	-	13,380	-	
	×6500				7,000	-	10,500	-	14,000	-	
	×7000				7,310	-	10,970	-	14,630	-	
	×7500				7,630	-	11,440	-	15,250	-	
	×8000				7,940	-	11,910	-	15,880	-	
	×8500				8,250	-	12,380	-	16,500	-	
1800	×5000	250	250	500	-	6,310	-	9,470	-	12,630	-
	×5500				6,630	-	9,940	-	13,250	-	
	×6000				6,940	-	10,410	-	13,880	-	
	×6500				7,250	-	10,880	-	14,500	-	
	×7000				7,560	-	11,340	-	15,130	-	
	×7500				7,880	-	11,810	-	15,750	-	
	×8000				8,190	-	12,280	-	16,380	-	
	×8500				8,500	-	12,750	-	17,000	-	
2000	×5000	350	350	500	-	9,360	-	14,040	-	18,730	-
	×5500				9,800	-	14,700	-	19,600	-	
	×6000				10,240	-	15,360	-	20,480	-	
	×6500				10,680	-	16,010	-	21,350	-	
	×7000				11,110	-	16,670	-	22,230	-	
	×7500				11,550	-	17,330	-	23,100	-	
	×8000				11,990	-	17,980	-	23,980	-	
	2200				×5000	350	350	500	200	9,360	-
×5500		9,800	-	14,700	-				19,600	-	
×6000		10,240	175 (350)	15,360	-				20,480	350 (700)	
×6500		10,680	175 (350)	16,010	263 (525)				21,350	350 (700)	
×7000		11,110	-	16,670	-				22,230	-	
×7500		11,550	-	17,330	-				23,100	-	
×8000		11,990	-	17,980	-				23,980	-	

呼び名(mm)	部材厚(mm)			嵩上高(mm)	参考質量(kg)						
	内高×内幅	側壁	底版		張出	1.0m		1.5m		2.0m	
						本体	嵩上板	本体	嵩上板	本体	嵩上板
2400	×5000	350	350	500	400	9,360	-	14,040	-	18,730	-
	×5500				9,800	-	14,700	-	19,600	-	
	×6000				10,240	-	15,360	-	20,480	-	
	×6500				10,680	350 (700)	16,010	525 (1050)	21,350	700 (1400)	
	×7000				11,110	-	16,670	-	22,230	-	
	×7500				11,550	-	17,330	-	23,100	-	
	×8000				11,990	-	17,980	-	23,980	-	
	2600				×5000	350	350	500	600	9,360	-
×5500		9,800	-	14,700	-				19,600	-	
×6000		10,240	-	15,360	-				20,480	-	
×6500		10,680	525 (1050)	16,010	790 (1580)				21,350	1050 (2100)	
×7000		11,110	-	16,670	-				22,230	-	
×7500		11,550	-	17,330	-				23,100	-	
×8000		11,990	-	17,980	-				23,980	-	
2800		×5000	350	350	500				800	9,360	-
	×5500	9,800				-	14,700	-	19,600	-	
	×6000	10,240				-	15,360	-	20,480	-	
	×6500	10,680				700 (1400)	16,010	1050 (2100)	21,350	1400 (2800)	
	×7000	11,110				-	16,670	-	22,230	-	
	×7500	11,550				-	17,330	-	23,100	-	
	×8000	11,990				-	17,980	-	23,980	-	
	3000	×5000				350	350	500	1,000	9,360	-
×5500		9,800	-	14,700	-				19,600	-	
×6000		10,240	-	15,360	-				20,480	-	
×6500		10,680	875 (1750)	16,010	1310 (2620)				21,350	1750 (3500)	
×7000		11,110	-	16,670	-				22,230	-	
×7500		11,550	-	17,330	-				23,100	-	
×8000		11,990	-	17,980	-				23,980	-	

※括弧内は嵩上板2枚分の重量です